


Gardner Denver

7.5-40 HP | RECIPROCATING BARE PUMPS

A-Series



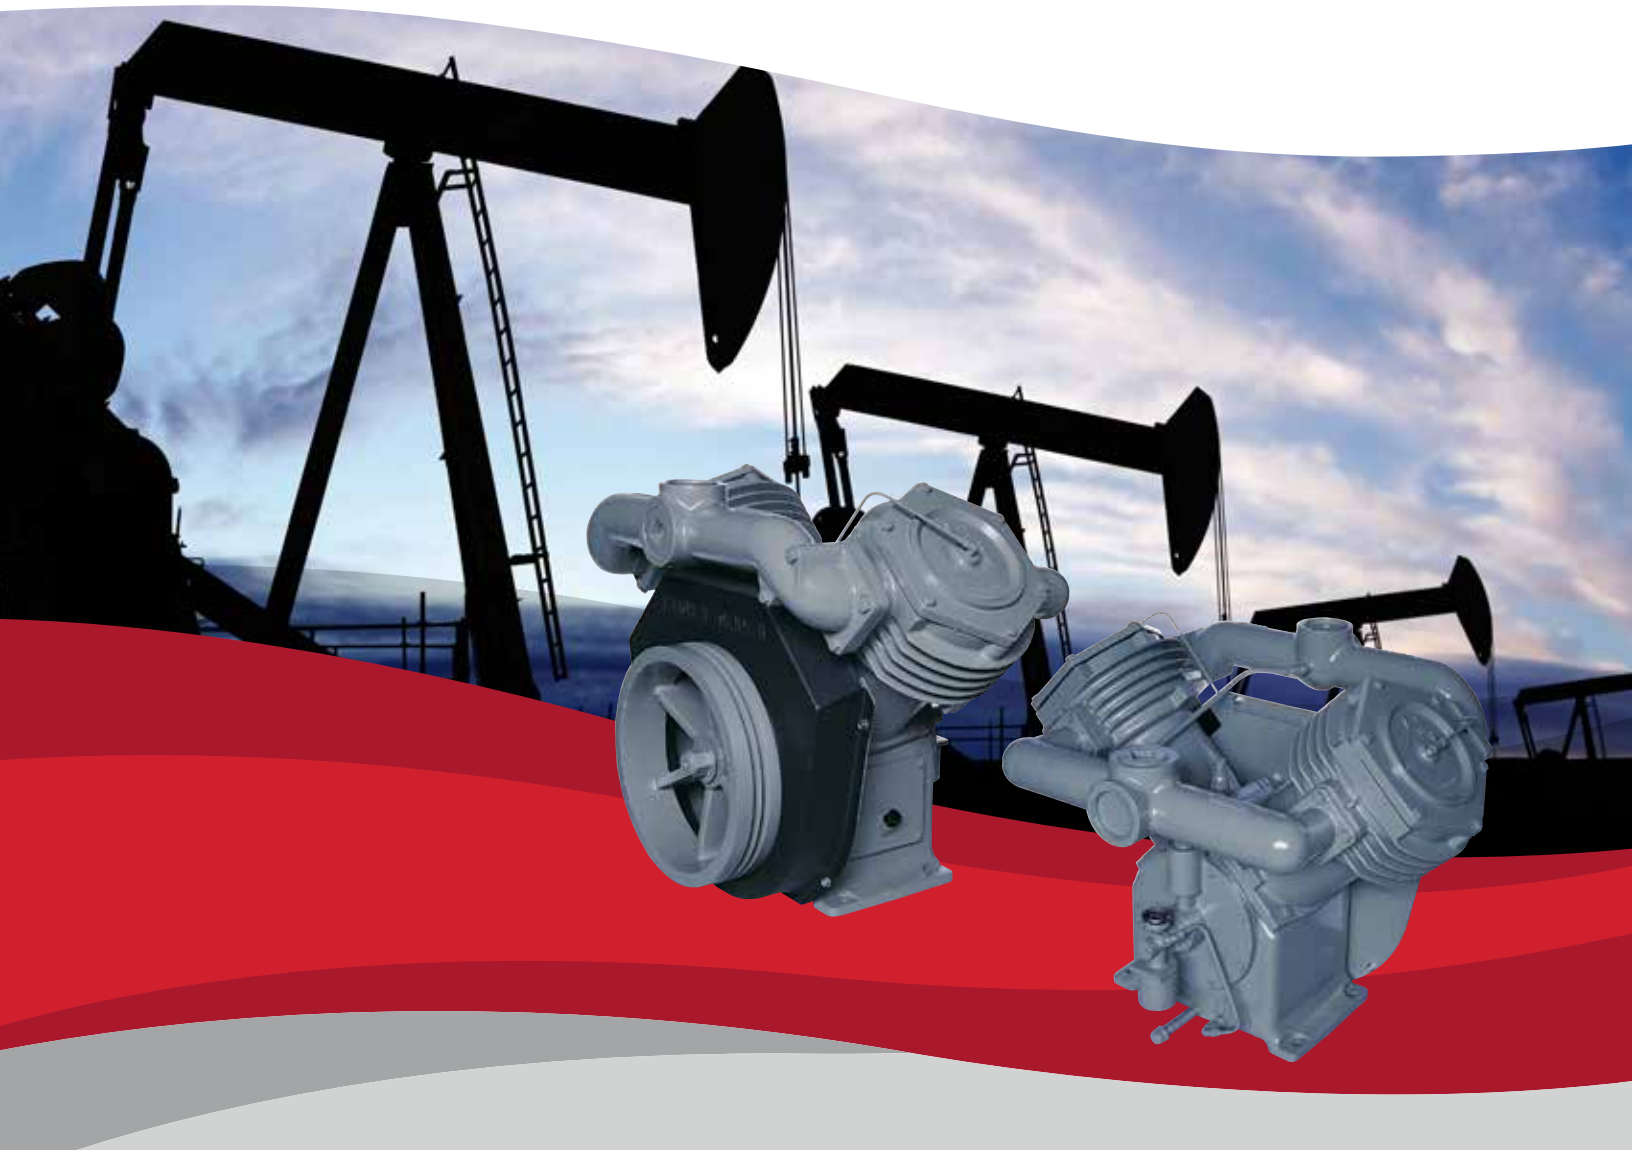

Rugged **Durability** Premium Performance

A Winning Combination

Gardner Denver compressors are proven units, known for their reliability over decades of use. We know our products and understand how they operate in many different operating environments. No matter the application, Gardner Denver gets the job done.



Accessibility & Reliability

Gardner Denver A-Series reputation is built on quality, reliability and accessibility to all components. With a broad range of models, A-Series compressors are designed to provide optimum performance in a wide variety of operations. Regardless of the application, Gardner Denver gets the job done.





Reciprocating
Benefit Design **Service** Options Reliable
Dependable Confidence
Solution
Durability Value Package Convenience
Competitive Performance Technology
Longevity

A-Series Bares

Compressor designs optimized for premium service in the following applications:

- Bulk Material Handling
- Engine Starting
- Well Head Servicing
- Petroleum Refineries
- Industrial Spraying

DIMENSIONS

MODEL	BORE DIAMETER		STROKE	SUCTION & DISCHARGE PIPE SIZE NPT	DIMENSIONS L × W × H	WEIGHT	
APL	in	7.875/7.875	3	3	41 × 29 × 30	lbs	750
	mm	200	76	NA	1041 × 737 × 762	kg	340
APO	in	7.875/7.875	4.5	3	41 × 29 × 30	lbs	750
	mm	200	114	NA	1041 × 737 × 762	kg	340

COMPRESSOR SPECIFICATIONS

MODEL	SPEED HP/KW	PRESSURE		CAPACITY	
		PSIG	BAR	CFM	M ³ /MIN
APL	855 15/11.2	20	1.4	113	3.2
		30	2.1	105	3.0
		40	2.8	98	2.8
		50	3.4	90	2.5
		60	4.1	83	3.1
APO	698 20/14.9	20	1.4	145	4.1
		30	2.1	134	3.8
		40	2.8	125	3.5
		50	3.4	117	3.3
		60	4.1	110	3.1
APO	885 25/18.6	20	1.4	181	5.1
		30	2.1	169	4.8
		40	2.8	158	4.5
		50	3.4	148	4.2
		60	4.1	138	3.9
APO	1072 30/22.4	20	1.4	218	6.1
		30	2.1	205	5.8
		40	2.8	192	5.4
		50	3.4	180	5.1
		60	4.1	168	4.8

VACUUM SPECIFICATIONS

MODEL	SPEED HP/KW	CAPACITY		VAC. - HG	
		CFM	M ³ /MIN	IN	MM
APL	780 5/3.7	120	3.4	5	127
		114	3.2	10	254
		105	3.0	15	381
		92	2.6	20	508
		60	1.7	25	635
APO	739 7.5/5.6	NA	NA	28	711
		167	4.7	5	127
		164	4.6	10	254
		157	4.4	15	381
		145	4.1	20	508
APO	937 10/7.5	99	2.8	25	635
		NA	NA	28	711
		198	5.6	5	127
		193	5.5	10	254
		185	5.2	15	381
APO	937 10/7.5	169	4.8	20	508
		117	3.5	25	635
		NA	NA	28	711


28" HG-60 PSIG (0.95-4.1 BAR)

CONTINUOUS OPERATION

5-30 HP (3.7-22.4 KW)



**APLGAA-GD, APLGBA-GD,
APLHAA-GD, APLHBA-GD**
Single-Stage Compressor



**APOGAA-GD, APOGBA-GD,
APOHAA-GD, APOHBA-GD**
Single-Stage Compressor

The leader in every market we serve
by continuously improving all business processes
with a focus on innovation and velocity

**Gardner
Denver®**

Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
866-440-6241



©2018 Gardner Denver, Inc. Printed in U.S.A.
GR-A-SERIES 2nd Ed. 6/18

 Please recycle after use.